

ICBDEC2450W



FEATURES

Easily customize settings with the tap of a finger via the conveniently accessible touch control panel

Store reds and whites in separate temperature zones that keep wines at proper serving temperatures, within one degree of setpoint

Full-extension wine racks provide easy access to standard-size bottles, half bottles, and magnums without agitating others

UV-resistant glass door shields wine from harmful light

Inventory tile system aids collection organization

Sub-Zero offers an industry-leading full two-year warranty on appliances, along with a full five-year sealed system warranty

Ready to be fitted with custom panels and handles to blend with cabinetry

ACCESSORIES

24" Designer Series Bulk Storage Drawer

Designer Series Dessert Wine Rack

Designer Solid Panel Ready Wine Storage Door - Left Hinge

Designer Solid Panel Ready Wine Storage Door - Right Hinge

Door Lock Kit

Dual Installation Kit Handle-to-Handle

Dual Installation Kit Hinge to Hinge

Reduced Toekick Divider

Stainless Steel Door Panel with Pro Handle and Lock and 4" Toe Kick - Left Hinge

Stainless Steel Door Panel with Pro Handle and Lock and 4" Toe Kick - Right Hinge

Stainless Steel Door Panel with Tubular Handle and Lock and 4" Toe Kick - Left Hinge

Stainless Steel Door Panel with Tubular Handle and Lock and 4" Toe Kick - Right Hinge

Stainless Steel Side Panel

Stainless Steel Wine Storage Door Panel with Pro Handle and 4" Toe Kick - Left Hinge

Stainless Steel Wine Storage Door Panel with Pro Handle and 4" Toe Kick - Right Hinge

Stainless Steel Wine Storage Door Panel with Tubular Handle and 4" Toe Kick - Left Hinge

Stainless Steel Wine Storage Door Panel with Tubular Handle and 4" Toe Kick - Right Hinge

Wine Inventory Tiles

Wine Inventory Tiles - Writable

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



HANDLE ACCESSORIES

PRO



TUBULAR




PRODUCT SPECIFICATIONS

Model	ICBDEC2450W
Dimensions	610mmW x 2134mmH x 610mmD
Weight	185 kg
Electrical Supply	220-240 VAC, 50/60 Hz
Electrical Service	≤ 2 A
Receptacle	3-prong grounding-type

PANEL SPECIFICATIONS For complete panels specifications including width/height, weight requirements and thickness requirements visit subzero-wolf.com/reveal.

NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW

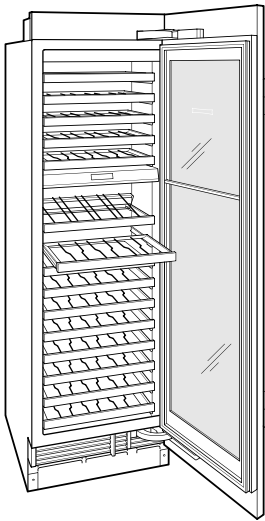

This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

