



---

## DUAL FUEL DESIGN GUIDE

## TABLE OF CONTENTS

|   |        |
|---|--------|
| 3 | RANGES |
|---|--------|



Features and specifications are subject to change at any time without notice.


Throughout this guide, dimensions may vary by  $\pm 3$  mm.

Dual Fuel Ranges

Discover a new world of cooking—the best of two worlds, actually—with a Wolf dual fuel range. Topside, gas cooking in all its glory, with the fine control of dual-stacked, sealed burners and options that include the remarkable French top. Below, that marvel of culinary technology, the Wolf convection electric oven. Its two fans and four heating elements let you select from 10 cooking modes so you can choose the one precisely suited to the dish you're preparing. Ovens are self-cleaning. With a variety of range widths to choose from, kitchens large and small become gateways to the exciting new world of dual fuel cooking. All models are constructed of stainless steel and can be ordered in natural or LP gas.


CONFIGURATIONS

76 cm RANGE




ICBDF304


91 cm RANGE



ICBDF366




ICBDF364C




ICBDF364G


122 cm RANGE




ICBDF486C



ICBDF486G




ICBDF484CG




ICBDF484F

152 cm RANGE




ICBDF606CG




ICBDF604CF

Dual Fuel Ranges


76 cm RANGE

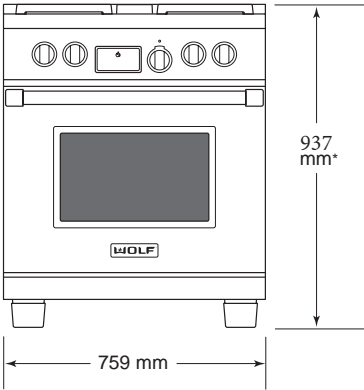



91 cm RANGE

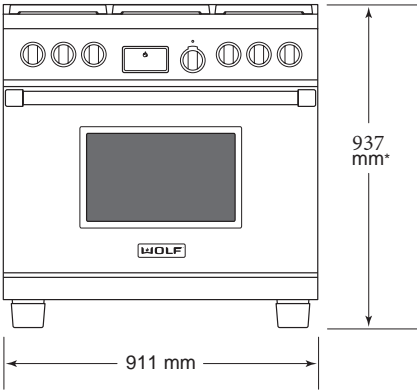

122 cm RANGE

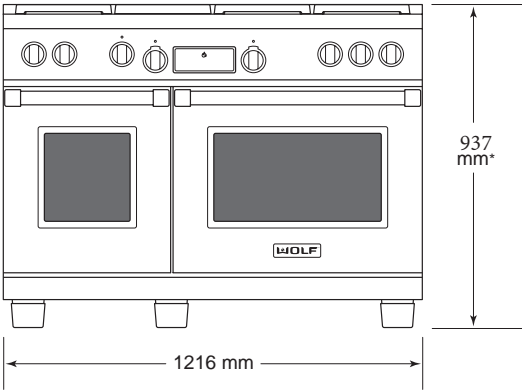

152 cm RANGE

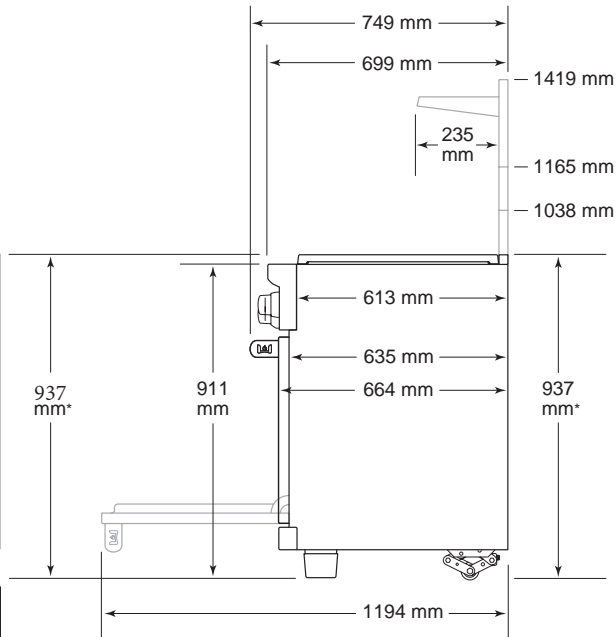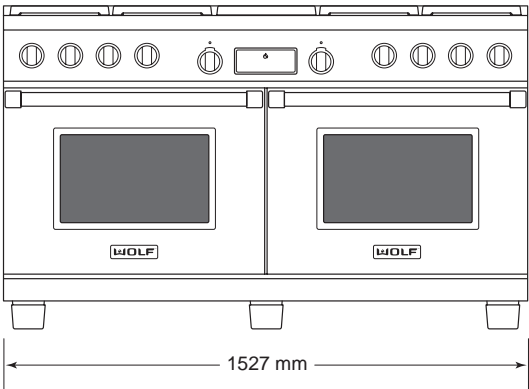

\*937 mm MIN TO 991 mm MAX.

SIDE VIEW—ALL RANGES

Dual Fuel Ranges

| BURNER RATING—Mj/h |    |
|--------------------|----|
| <hr/>              |    |
| SURFACE BURNER     | NG |
| Large              | 16 |
| Small              | 9  |
| <hr/>              |    |
| FEATURE            | NG |
| Charbroiler        | 15 |
| Griddle            | 15 |
| French Top         | 15 |
| <hr/>              |    |

Planning Information

When installing against a combustible surface, a minimum 254 mm riser is required for a 91 cm dual fuel range with charbroiler or griddle and all 122 cm and 152 cm models. Follow all minimum clearances to combustible surfaces shown in the illustration on the following page.

A Wolf pro ventilation hood is recommended with the dual fuel range.

ELECTRICAL

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply flush with the wall or floor and within the shaded area shown in the illustration on the following page. A separate circuit, servicing only this appliance is required.

Wolf dual fuel ranges have a terminal block that allows for a 3-wire or 4-wire installation.

Performance may be compromised if the electrical supply is less than 220 volts.

The range is supplied with a single phase and 3-phase convertible power inlet box. The wiring diagram covering the control circuit is provided with the oven.

REQUIRED POWER SUPPLY

|              |                       |
|--------------|-----------------------|
| Single phase | 220-240V AC, 50/60 Hz |
| 3phase       | 380-415V AC, 50 Hz    |

MAXIMUM CONNECTED LOAD

| DUAL FUEL RANGES  | SINGLE PHASE | 3PHASE  |
|-------------------|--------------|---------|
| 762 mm and 914 mm | 19 amps      | 18 amps |
| 1219 mm           | 35 amps      | 18 amps |
| 1524 mm           | 38 amps      | 18 amps |

GAS SUPPLY

Installation must conform with all applicable gas codes. A gas supply line of 19 mm rigid pipe is advisable to be provided to the range. If local codes permit, a certified, .9 m long, 13 mm or 19 mm ID flexible appliance connector is recommended to connect the units ISO 7/1-14 female inlet to the gas supply line.


Wolf natural gas ranges will function up to 3124 m in altitude without adjustment and LP gas ranges will function up to 2621 m. If the installation exceeds these elevations, contact an authorized Wolf dealer for a high altitude conversion kit.

GAS REQUIREMENTS

|                 |         |
|-----------------|---------|
| NATURAL GAS     |         |
| Supply Pressure | 1 Kpa   |
| LP GAS          |         |
| Supply Pressure | 2.75Kpa |

Dual Fuel Range

INSTALLATION

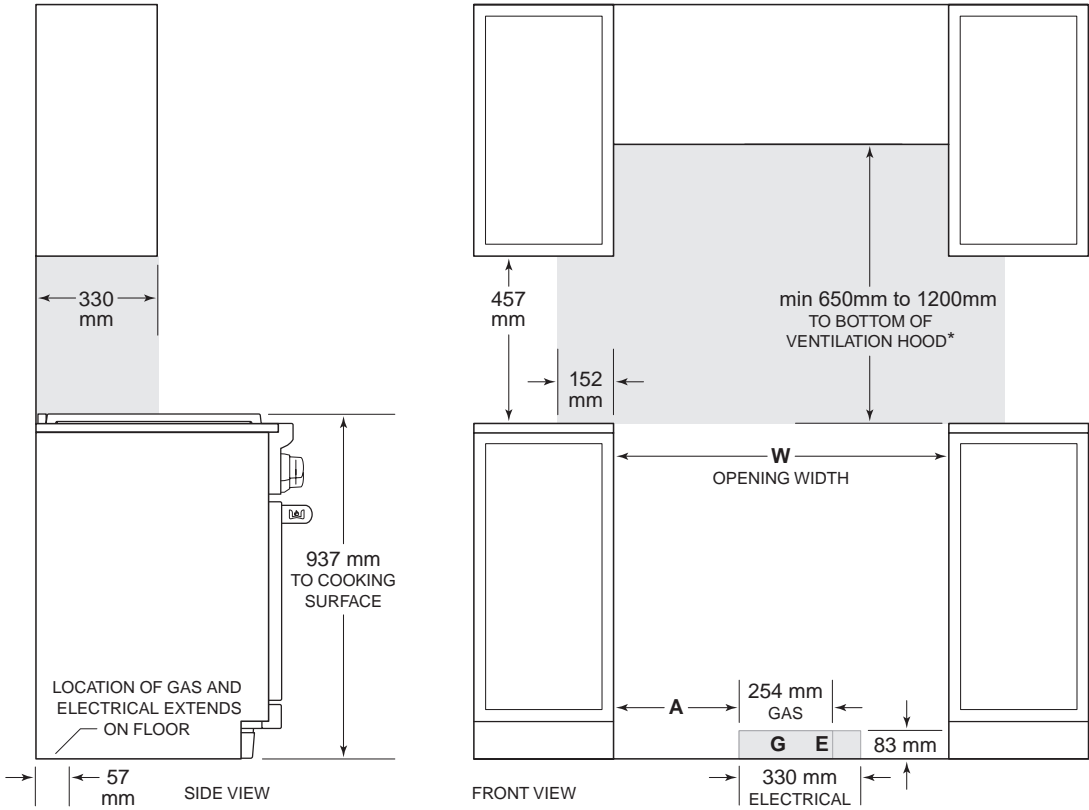

*\*The rangehood fitted above the cooktop must be installed according to the installation instructions for the rangehoods.*

*A minimum clearance of 650mm from the top of the burner port to a grease filter/range hood/combustible surface and 750mm to an Exhaust fan. For models with Char Grill burner a minimum clearance of 1200mm to a grease filter/range hood/combustible surface from the top of the burner ports of the Char Grill burner*

NOTE:

*For island installation, 305 mm minimum clearance back of range to combustible rear wall above countertop.*

| OPENING WIDTH | W       | A      |
|---------------|---------|--------|
| 76 cm Model   | 762 mm  | 216 mm |
| 91 cm Model   | 914 mm  | 343 mm |
| 122 cm Model  | 1219 mm | 610 mm |
| 152 cm Model  | 1530 mm | 787 mm |

## **Wolf Appliance International Limited Warranty**

FOR RESIDENTIAL USE

### **FULL TWO YEAR WARRANTY\***

For two years from the date of original installation, this Wolf Appliance product warranty covers all parts and labor to repair or replace, under normal residential use, any part of the product that proves to be defective in materials or workmanship. All service provided by Wolf Appliance under the above warranty must be performed by Wolf factory certified service, unless otherwise specified by Wolf Appliance, Inc. Service will be provided during normal business hours.

### **LIMITED THIRD THROUGH FIFTH YEAR WARRANTY**

For five years from the date of original installation, Wolf Appliance will repair or replace the following parts that prove to be defective in materials or workmanship: gas burners (excluding appearance), electric heating elements, blower motors (ventilation hoods), electronic control boards, magnetron tubes and induction generators. The part(s) will be repaired or replaced, free of charge, with the owner paying for all other costs including labor. All service provided by Wolf Appliance under the above warranty must be performed by Wolf factory certified service, unless otherwise specified by Wolf Appliance, Inc. Service will be provided during normal business hours.

For more information regarding your Wolf product warranty, contact your authorized Wolf dealer. Warranties must comply to all country, state, city, local and or ordinance.

\*Stainless steel (doors, panels, handles, product frames and interior surfaces) are covered by a limited 60-day parts and labor warranty for cosmetic defects.







[subzero-wolf.com.au](http://subzero-wolf.com.au)