

ICBBI-48SID/O



FEATURES

- _____ Rigorously tested to ensure decades of use
- _____ Exceptional support from Customer Care team
- _____ LED Lighting for brighter interior
- _____ Dual refrigeration keeps food fresher longer
- _____ Air purification system fights spoilage, odours
- _____ Microprocessor control assures peak performance
- _____ Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness
- _____ Freshness cards for maximum food preservation
- _____ Magnetic door seal system locks in cold air
- _____ Automatic ice maker with "max ice" feature
- _____ Adjustable shelves for maximum convenience
- _____ Ice and chilled water dispenser inside the refrigerator marries convenience and aesthetics
- _____ Water-filtration system reduces contaminants, chlorine taste and odor
- _____ Overlay design accepts cabinetry panels of all kinds


ACCESSORIES

- _____ Grilles for 2108 mm or 2235 mm finished height (2134 mm is standard)
- _____ Flush inset panels in stainless steel with tubular or pro handles
- _____ Full-length standard and extended framed handles
- _____ Framed front panels in white or stainless steel
- _____ Custom front panel mounting kit
- _____ Stainless Steel Pro Handles
- _____ Stainless Steel Tubular Handles

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



HANDLE ACCESSORIES

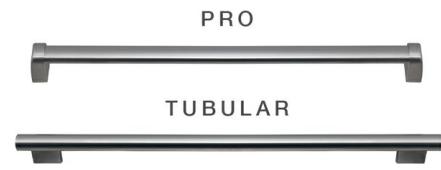

PRODUCT DETAILS

REFRIGERATOR

- Internal ice and water dispenser
- 4 Adjustable glass shelves
- 1 High-humidity drawer with divider
- 2 Storage drawers with divider
- 3 Adjustable door shelves
- 2 Stationary door shelves
- Adjustable dairy compartment
- Air purification system


FREEZER

- Automatic ice maker
- 3 Adjustable wire shelves
- 3 Storage drawers
- 5 Adjustable door shelves
- Water filtration system


PRODUCT SPECIFICATIONS

Model	ICBBI-48SID/O
Dimensions	1219mmW x 2134mmH x 610mmD
Door Clearance	762mm
Weight	298 kg
Refrigerator Gross Capacity	521 L
Freezer Gross Capacity	278 L
Electrical Supply	220-240 VAC; 50/60 Hz
Electrical Service	≤ 4 A
Receptacle	3-prong grounding-type

ELECTRICAL



PLUMBING




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW




This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

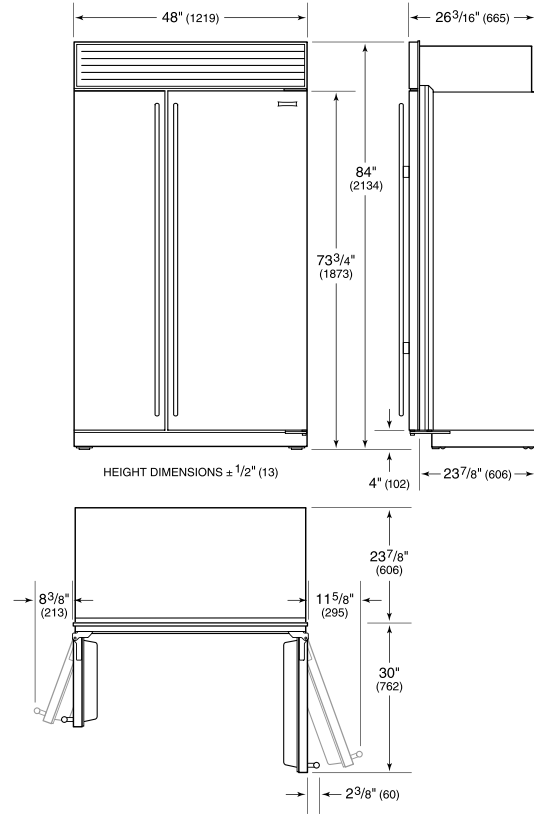

FLUSH INSET INSTALLATION

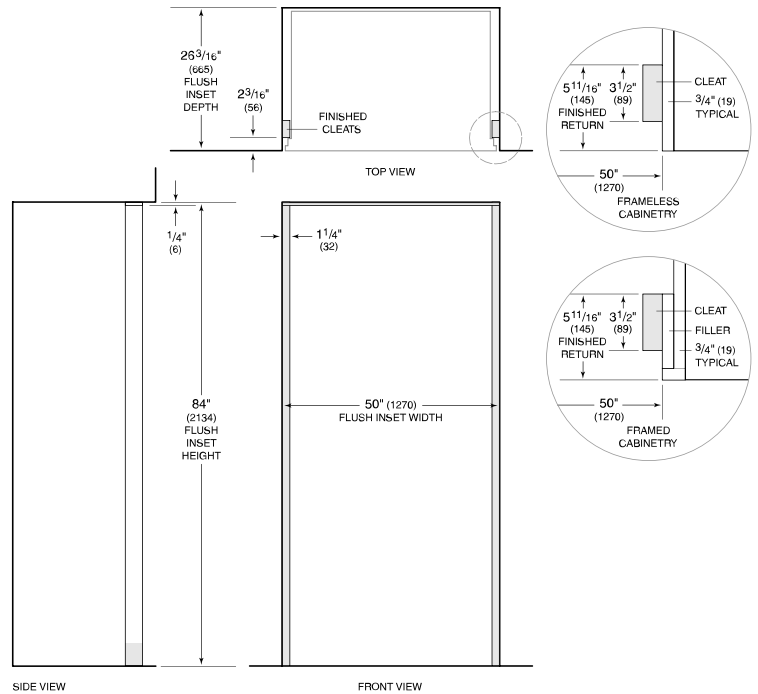

NOTE: 3/2" (89) finished returns and shaded areas will be visible and should be finished to match cabinetry. Shaded line represents profile of unit with 3/4" (19) panel.