

ICBBW-30/O



FEATURES

- Panel ready for your custom cabinetry
- Dual evaporators for constant, moderate humidity so corks don't dry out
- UV-resistant glass door protects against premature wine aging
- Textured roller-glide shelves for access without agitating wine
- Brighter LED lighting makes finding bottles easy
- Intuitive control panel keeps temps within one degree of set point
- Home security system connection
- Inventory tile system for better organization
- Star-K compliant
- Two independent temperature zones hold reds and whites at proper serving temperature
- Rigorously tested to ensure decades of use
- Exceptional support from Customer Care team

ACCESSORIES

- Cherrywood humidor
- Bulk storage drawer
- Wine inventory tiles
- Wine inventory tiles -writable
- Dessert wine rack
- Flush inset 76 cm pro louvered grille panel
- Flush inset 76 cm solid stainless steel grille panel
- Flush inset stainless steel front panel with pro handle
- Flush inset stainless steel front panel with tubular handle
- Lock kit
- Stainless steel kickplate - RH
- Stainless steel kickplate - LH
- Stainless steel side panel
- White side panel
- Dual installation kit with or without dual wide grille—213 cm finished height
- Built-in custom side panel mounting kit
- 90° door stop

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



HANDLE ACCESSORIES

PRO




TUBULAR



PRODUCT SPECIFICATIONS


| | |
|-----------------------|---------------------------|
| Model | ICBBW-30/0 |
| Dimensions | 762mmW x 2134mmH x 610mmD |
| Door Clearance | 796mm |
| Weight | 202 kg |
| Electrical Supply | 220-240 VAC; 50/60 Hz |
| Electrical Service | ≤ 2 A |
| Wine Storage Capacity | 147 Bottles |
| Receptacle | 3-prong grounding-type |

ELECTRICAL




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW

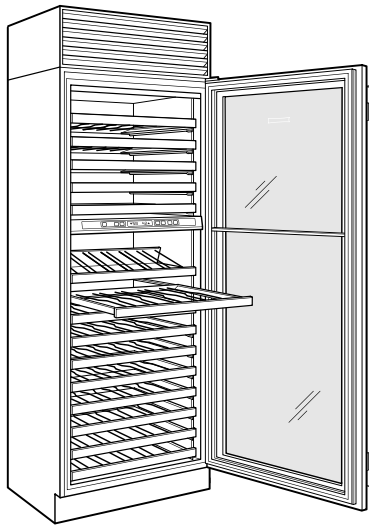


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

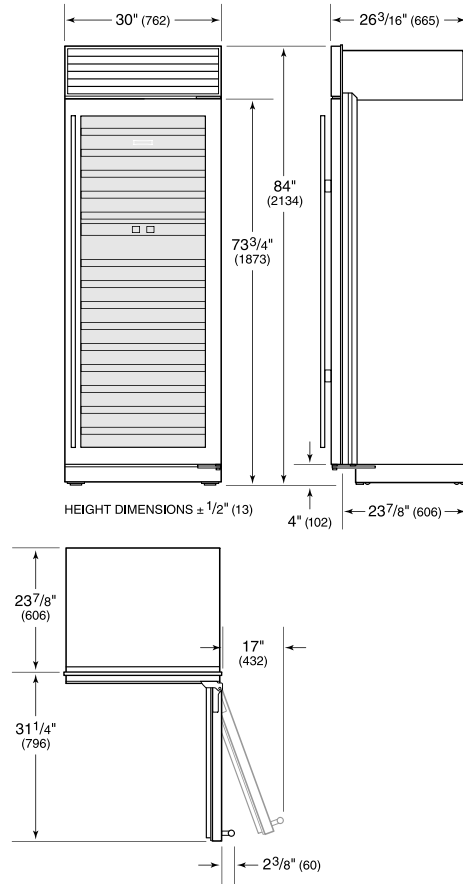

FLUSH INSET INSTALLATION

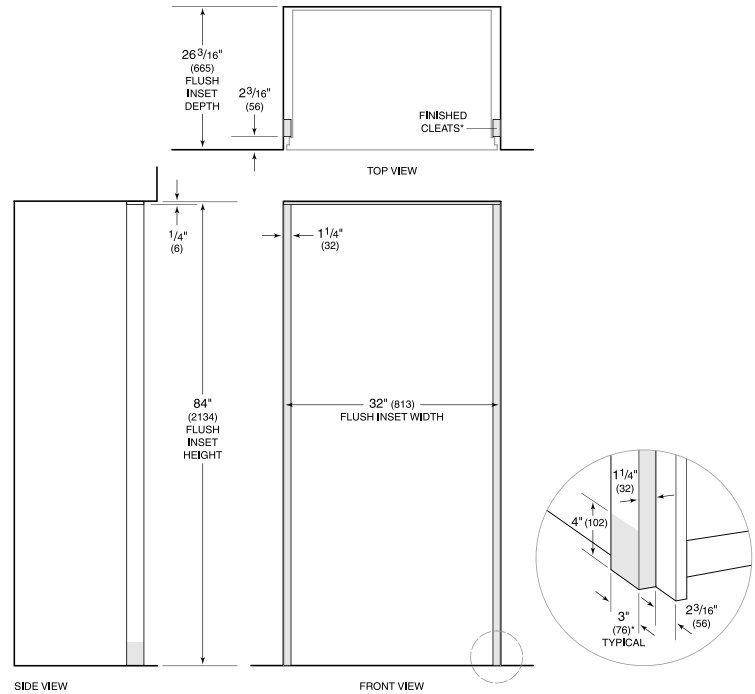

*3" (76) typical depth. Shaded areas will be visible and should be finished to match cabinetry.
NOTE: Shaded line represents profile of unit with 3/4" (19) panel.