

ICBDF364G

FEATURES

- Dual-stacked burners produce up to 16 MJ/h
- Continuous cast-iron grates for easy movement of pots and pans
- Cobalt blue porcelain interior
- Dual convection oven for faster, more consistent cooking
- Spark ignition system re-ignites if flame goes out
- Heavy-gauge stainless steel
- Exclusive pivoting control panel
- Red, black or stainless steel control knobs
- Temperature probe cooks to ideal doneness and lets you know when it's ready
- Self clean, delayed start, timed cook, Sabbath mode and more
- Burners capable of delivering less than 0.5 MJ for premier simmer performance
- 10 cooking modes make meals easy
- Rigorously tested for decades of use
- Exceptional support from our Customer Care team
- Burners capable of delivering less than 300 Btu for premier simmer performance
- 10 cooking modes make meals easy
- 4 dual-stacked burners plus 15 MJ/h infrared teppanyaki
- Continuous cast-iron grates for easy movement of pots and pans
- Cobalt blue porcelain interior
- Dual-stacked burners produce up to 16 MJ/h
- Dual convection oven for faster, more consistent cooking
- Spark ignition system re-ignites if flame goes out
- Heavy-gauge stainless steel
- Exclusive pivoting control panel
- Red, black or stainless steel control knobs
- Temperature probe cooks to ideal doneness and lets you know when it's ready
- Self clean, delayed start, timed cook, Sabbath mode and more

ACCESSORIES

- Stainless steel, brass or chrome bezels
- 13 cm and 25 cm stainless steel risers, and 51 cm riser with shelf


Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



KNOB OPTIONS



TOP CONFIGURATION

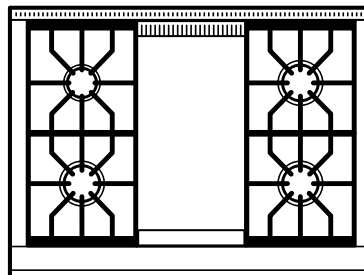


RANGETOP SPECIFICATIONS

- 1 - 9 MJ/h Burner
- 3 - 16 MJ/h Burner
- 1 - 15 MJ/h Teppanyaki

PRODUCT SPECIFICATIONS


Model	ICBDF364G
Dimensions	911mmW x 937mmH x 749mmD
Oven 1 Interior Dimensions	762mmW x 419mmH x 483mmD
Oven 1 Overall Capacity	153 L
Door Clearance	495mm
Weight	202 kg
Electrical Supply	220-240 VAC; 50/60 Hz
Electrical Service	19 amp
Gas Inlet	Class B or Class D hose assembly

DIMENSIONS

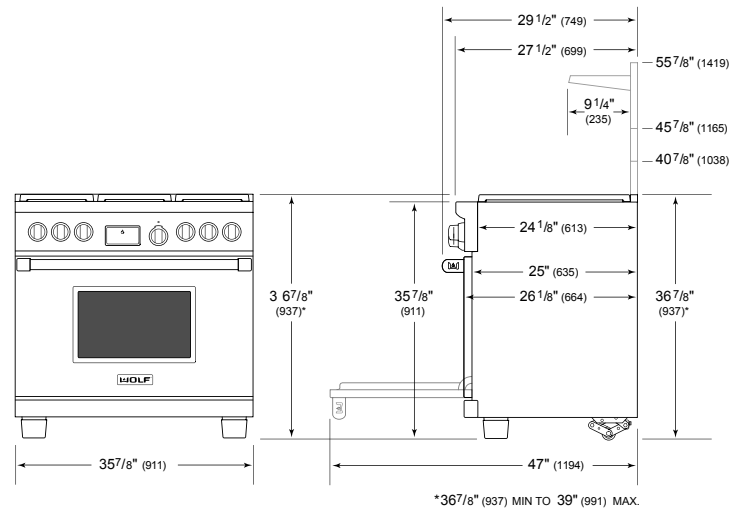


ELECTRICAL

GAS

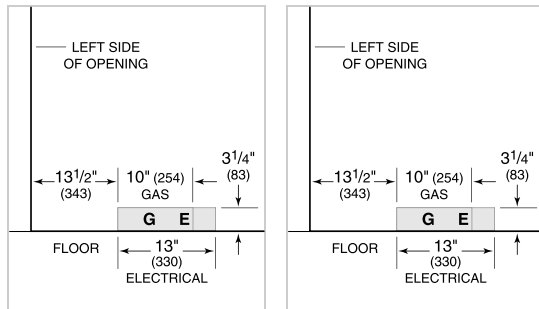

NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

STANDARD INSTALLATION

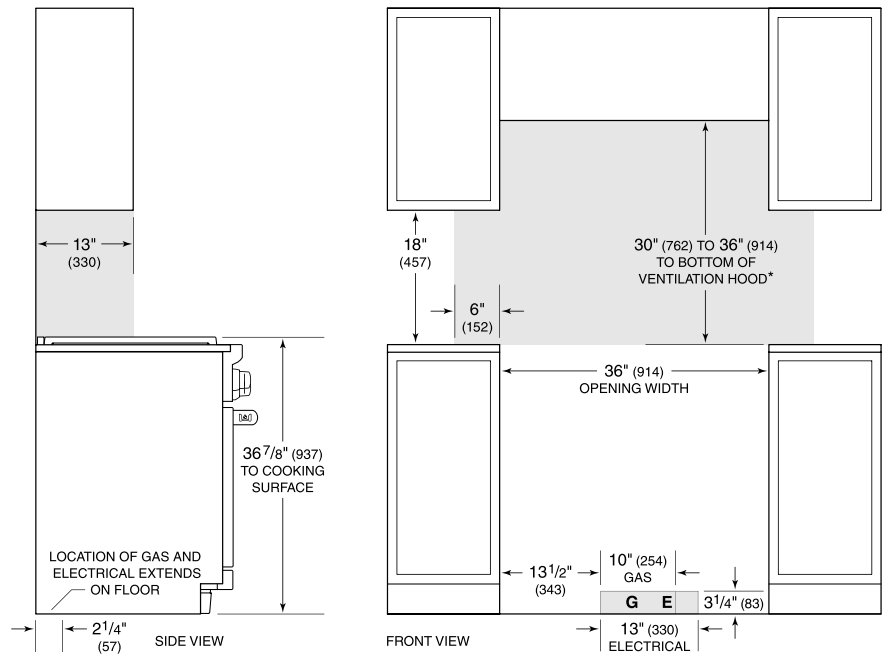

**Without ventilation hood, 36\" (914) minimum clearance countertop to combustible materials, 44\" (118) for charbroiler.*

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12\" (305) minimum clearance back of range to combustible rear wall above countertop.