

## ICBDF484CG

### FEATURES

4 dual-stacked burners plus 15 MJ/h chargrill and 15MJ/h teppanyaki

Burners capable of delivering less than 0.5 MJ for premier simmer performance

10 cooking modes make meals easy

Dual-stacked burners produce up to 16 MJ/h

Dual convection oven for faster, more consistent cooking

Second 48 cm single convection oven

Rigorously tested for decades of use

Exceptional support from our Customer Care team

Continuous cast-iron grates for easy movement of pots and pans

Cobalt blue porcelain interior

Spark ignition system re-ignites if flame goes out

Heavy-gauge stainless steel

Exclusive pivoting control panel

Red, black or stainless steel control knobs

Temperature probe cooks to ideal doneness and lets you know when it's ready

Self clean, delayed start, timed cook, Sabbath mode and more

### ACCESSORIES

Stainless steel, brass or chrome bezels

13 cm and 25 cm stainless steel risers, and 51 cm riser with shelf

76 cm baking sheet

Hardwood cutting board

Accessories available through an authorized dealer.


For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



### KNOB OPTIONS



### TOP CONFIGURATION

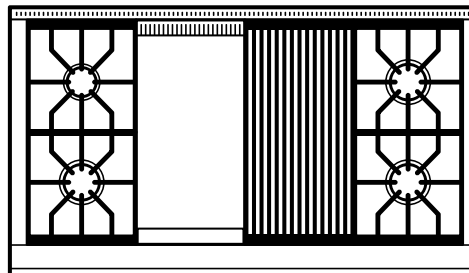


### RANGETOP SPECIFICATIONS

- 1 - 9 MJ/h Burner
- 3 - 16 MJ/h Burner
- 1 - 15 MJ/h Teppanyaki
- 1 - 15 MJ/h Chargrill


**PRODUCT SPECIFICATIONS**

Model	ICBDF484CG
Dimensions	1216mmW x 937mmH x 749mmD
Oven 1 Interior Dimensions	356mmW x 419mmH x 483mmD
Oven 2 Interior Dimensions	635mmW x 419mmH x 483mmD
Oven 1 Overall Capacity	70 L
Oven 2 Overall Capacity	127 L
Door Clearance	749mm
Weight	311 kg
Electrical Supply	220-240 VAC; 50/60 Hz
Electrical Service	35 amp
Gas Inlet	Class B or Class D hose assembly

**ELECTRICAL**




**GAS**




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

**DIMENSIONS**

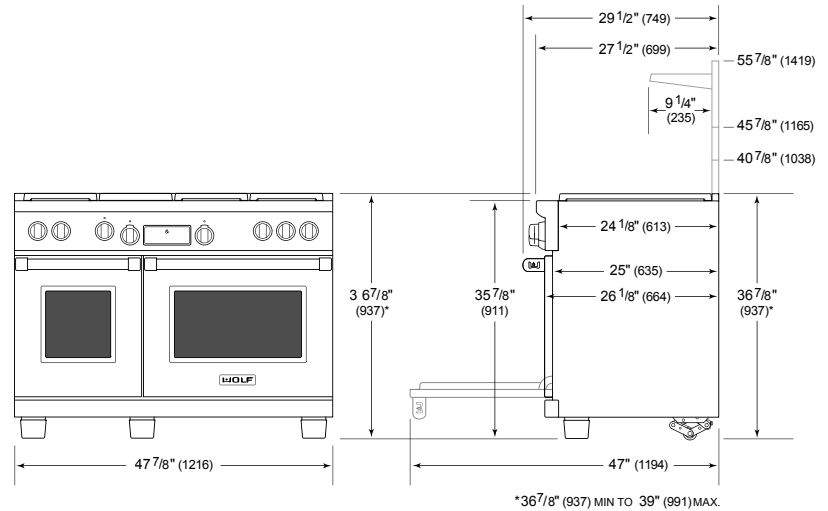

**STANDARD INSTALLATION**

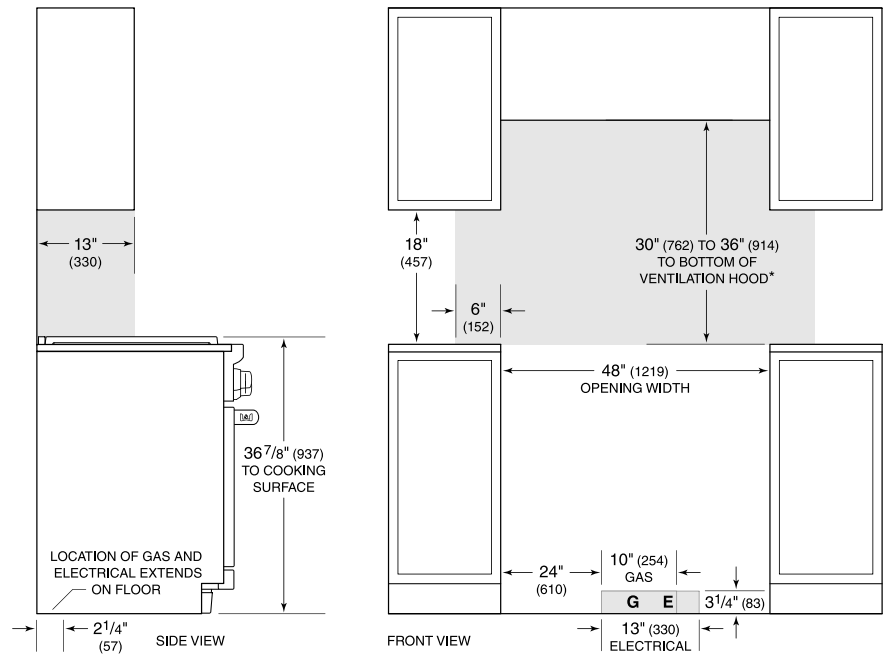

*\*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (1118) for charbroiler.  
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.  
For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.*