

ICBDF486C

FEATURES

- 6 dual-stacked burners plus 15 MJ/h infrared chargrill
- Burners capable of delivering less than 0.5 MJ for premier simmer performance
- 10 cooking modes make meals easy
- Dual-stacked burners produce up to 16 MJ/h
- Dual convection oven for faster, more consistent cooking
- Exclusive pivoting control panel
- Second 46 cm single convection oven
- Rigorously tested for decades of use
- Exceptional support from our Customer Care team
- Continuous cast-iron grates for easy movement of pots and pans
- Cobalt blue porcelain interior
- Spark ignition system re-ignites if flame goes out
- Heavy-gauge stainless steel
- Red, black or stainless steel control knobs
- Temperature probe cooks to ideal doneness and lets you know when it's ready
- Self clean, delayed start, timed cook, Sabbath mode and more

ACCESSORIES


- Stainless steel, brass or chrome bezels
- 13 cm and 25 cm stainless steel risers, and 51 cm riser with shelf
- 76 cm baking sheet
- Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



KNOB OPTIONS



TOP CONFIGURATION

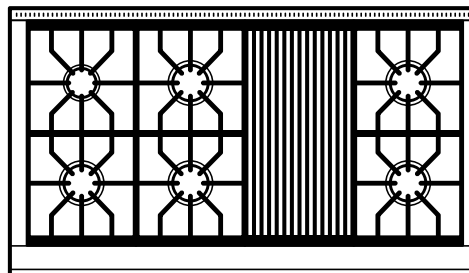


RANGETOP SPECIFICATIONS

- 1 - 9 MJ/h Burner
- 5 - 16 MJ/h Burner
- 1 - 15 MJ/h Chargrill


PRODUCT SPECIFICATIONS

Model	ICBDF486C
Dimensions	1216mmW x 937mmH x 749mmD
Oven 1 Interior Dimensions	356mmW x 419mmH x 483mmD
Oven 2 Interior Dimensions	635mmW x 419mmH x 483mmD
Oven 1 Overall Capacity	70 L
Oven 2 Overall Capacity	127 L
Door Clearance	749mm
Weight	311 kg
Electrical Supply	220-240 VAC; 50/60 Hz
Electrical Service	35 amp
Gas Inlet	Class B or Class D hose assembly

ELECTRICAL




GAS




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

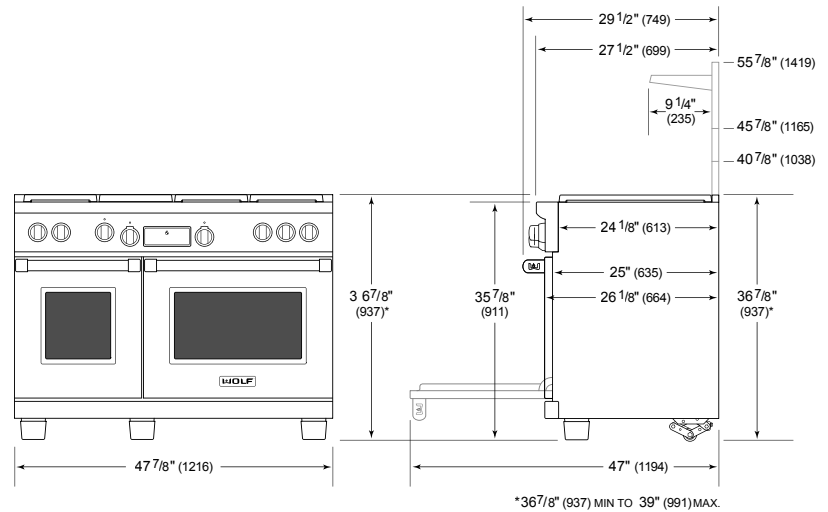

STANDARD INSTALLATION

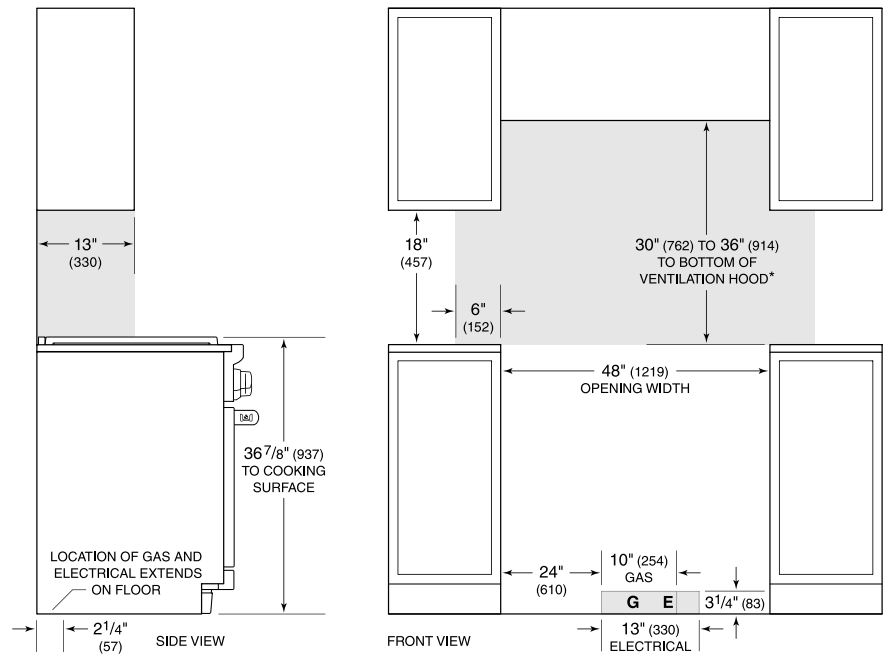

*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (118) for charbroiler.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.