76 CM TRANSITIONAL INDUCTION COOKTOP

ICBCI304T/S

FEATURES

Incredible cooking control, with lightning fast high heat and very low lows

Cooktop stays relatively cool for added safety and easy cleanup

Cookware sensing guards against hot burners being left on

Efficiently transfers heat, because energy is supplied directly to the cookware

COOKTOP SPECIFICATIONS

- 1 - 1,400 W element
- 1 - 2,100 W element
- 1 - 2,100 W element with 3,700 W boost
- 1 - 279mm 2,600 W element with 3,700 W boost

Specifications are subject to change without notice. This information was generated on April 26, 2024. Verify specifications prior to finalizing your cabinetry/enclosures.

76 CM TRANSITIONAL INDUCTION COOKTOP

PRODUCT SPECIFICATIONS

Model	ICBCI304T/S
Dimensions	762mmW x 51mmH x 533mmD
Weight	22 kg
Electrical Supply	220-240 VAC, 50/60 Hz
Electrical Service	7.4 kW

ELECTRICAL



NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

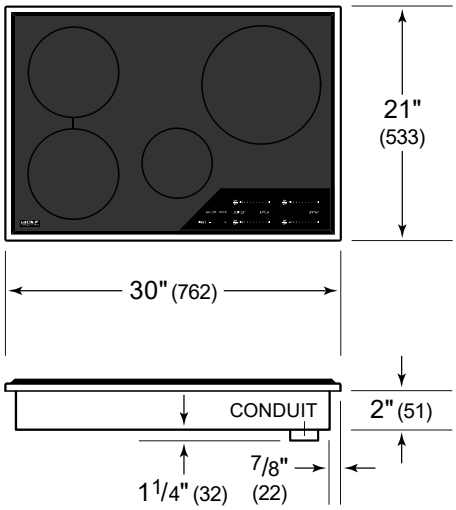

STANDARD INSTALLATION

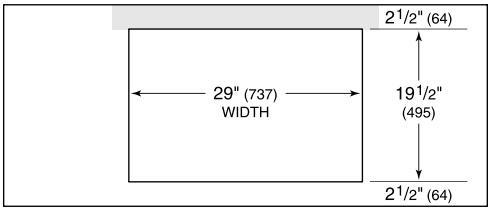

COUNTERTOP CUT-OUT

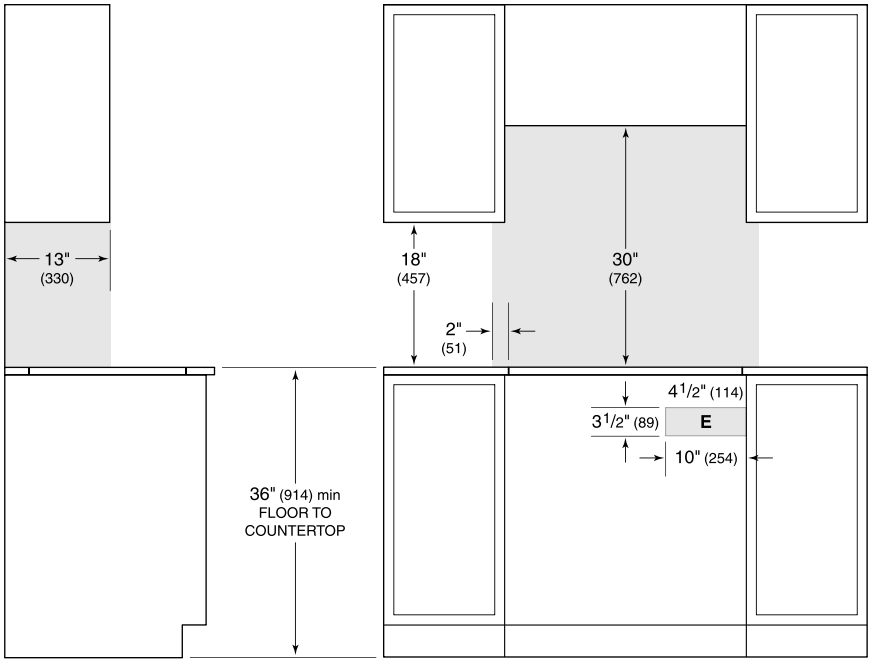

SIDE VIEW FRONT VIEW

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.
Electrical supply location only applies to installations with built-in oven.