



## MODULE COOKTOP DESIGN GUIDE

ICB REVISED 4 / 2018

## TABLE OF CONTENTS

3	MODULES
---	---------



Features and specifications are subject to change at any time without notice.

Throughout this guide, dimensions may vary by  $\pm 3$  mm.

## Module Cooktops

Wolf 38 cm modules have been redesigned to match the updated lines of Sub-Zero and Wolf. Controls, grates and trim allow them to integrate perfectly with their larger counterparts and deliver equal performance. Combine modules à la carte-style to create a custom cooktop, or add specialty functions alongside an existing cooktop. Full-size cooktops including ICBCI243TF/S, ICBCI304TF/S, and ICBCI365TF/S feature the same brushed stainless frame, making them ideal for pairing with modules.

### MODULE COOKTOPS



ICBCI152TF/S  
INDUCTION



ICBSM15TF/S  
STEAMER



ICBGM15TF/S  
GRILL



ICBTM15TF/S  
TEPPANYAKI




ICBCG152TF/S  
GAS




ICBMM15TF/S  
MULTIFUNCTION

Module Cooktops


INDUCTION

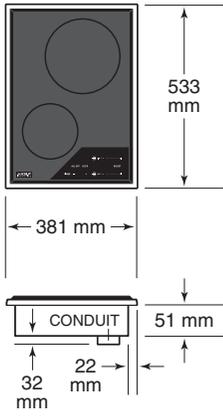


STEAMER

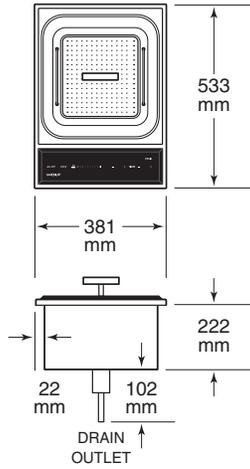


GRILL

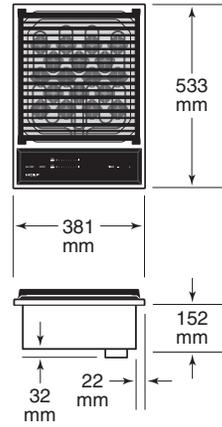


TEPPANYAKI

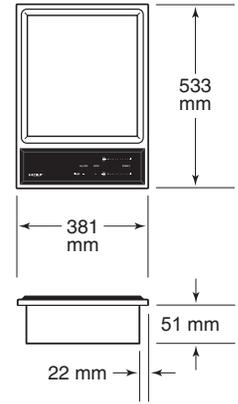

GAS

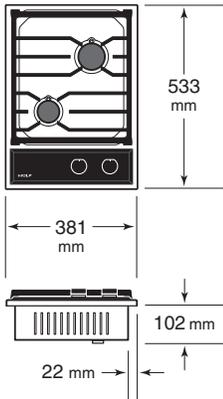

MULTIFUNCTION

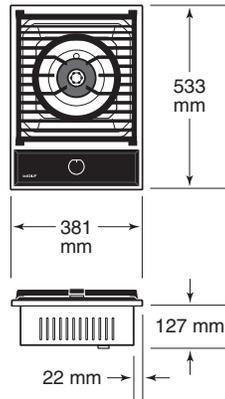

### Planning Information

**IMPORTANT NOTE:** Wolf does not recommend the use of downdraft ventilation with the steamer or grill modules.


A minimum 51 mm is required from the bottom of the module to combustible materials. For the teppanyaki module, a minimum 22 mm is required from the bottom of the unit to any material.

Refer to illustrations on the following pages for installation of modules.

When multiple modules are installed side by side, refer to the chart and illustration below for typical configurations. The cut-out dimensions provided will accommodate the use of an optional filler strip if desired.

COUNTERTOP CUT-OUT	W*
(2) 38 cm Modules	737 mm
(3) 38 cm Modules	1118 mm
(4) 38 cm Modules	1505 mm
(5) 38 cm Modules	1886 mm
(6) 38 cm Modules	2267 mm

*\*Dimensions apply to ICBCI152TF/S, ICBCE152TF/S, ICBCG152TF/S, ICBSM15TF/S, ICBGM15TF/S, ICBTM15TF/S and ICBMM15TF/S.*

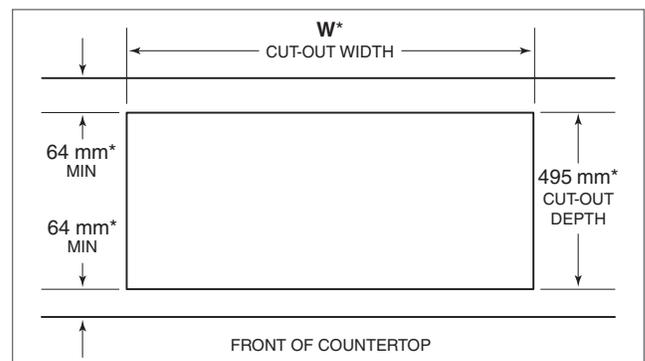

Countertop cut-out.

## Planning Information

### ELECTRICAL

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply as shown in the illustrations on the following pages. A separate circuit, servicing only this appliance is required.

The induction cooktop is supplied with a single phase and 3-phase convertible power inlet box.

When multiple cooktops or modules are installed side by side, each must have its own separate electrical supply.

### ELECTRICAL REQUIREMENTS

#### INDUCTION MODULE

Single Phase	220-240 VAC, 50/60 Hz
3-Phase	380-415 V AC 50 Hz
Total Amps	16

#### ELECTRIC MODULES

Electrical Supply	220-240 VAC, 50/60 Hz
Steamer, Teppanyaki	2700 W
Grill	2800 W

#### GAS MODULES

Electrical Supply	220-240 VAC; 50/60 Hz
Service	0.2 A standard 10 A power point
Receptacle	3-prong grounding-type
Power Cord	1.8 m

### DRAIN OUTLET

The steamer module requires a method for draining hot water. Options include connecting a drain hose from the 16 mm outlet tied into an existing drain, a separate drain with freefall or placing a heat-resistant receptacle under the drain outlet.

### GAS SUPPLY

Installation must conform with all applicable gas codes.

For gas modules, a gas supply line of 19 mm rigid pipe is advised to be provided to the module. If local codes permit, a certified, .9 m long, 13 mm or 19 mm ID flexible appliance connector is recommended to connect the units ISO 7/1-14 male inlet to the gas supply line.

When multiple gas cooktops or modules are installed side by side, they can receive their gas supply from a common line. However, each unit must have its own regulator installed between the mainline and the cooktop or module.

Wolf natural gas cooktops will function up to 3124 m in altitude without adjustment and LP gas cooktops will function up to 2621 m.

### GAS REQUIREMENTS

#### NATURAL GAS


Supply Pressure	1 Kpa
-----------------	-------

#### LP GAS


Supply Pressure	2.75 Kpa
-----------------	----------

### Induction Module

#### STANDARD INSTALLATION

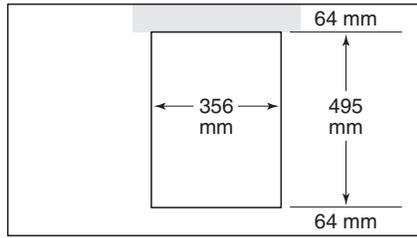

COUNTERTOP CUT-OUT

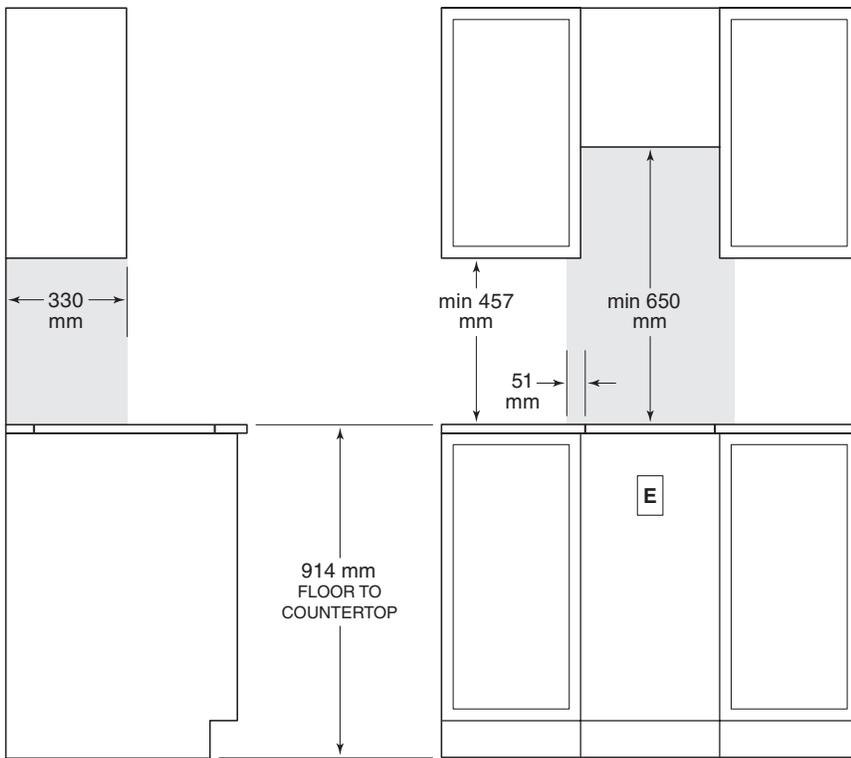


SIDE VIEW

FRONT VIEW


*NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.*

Steamer Module


STANDARD INSTALLATION

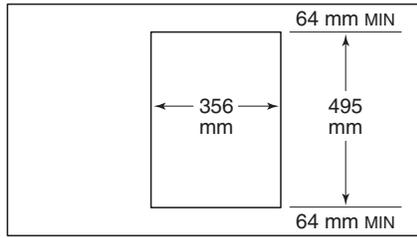

COUNTERTOP CUT-OUT

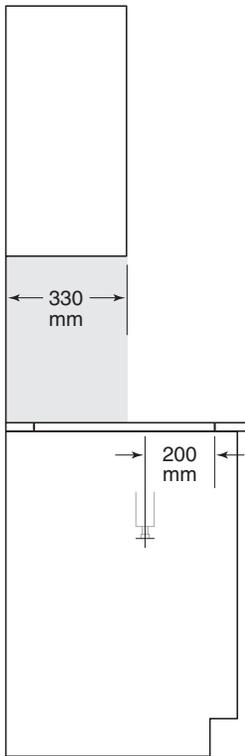

SIDE VIEW

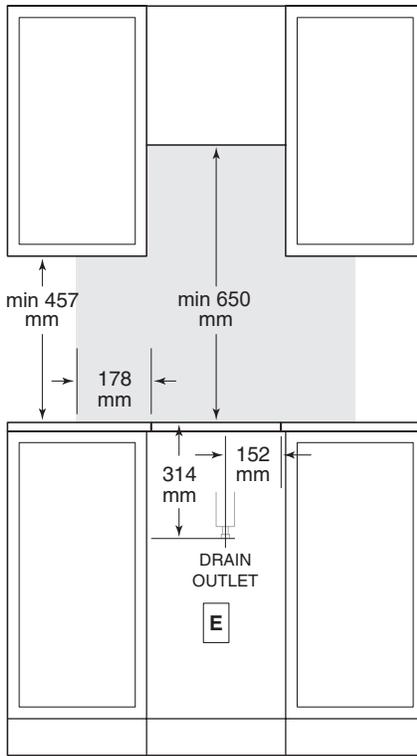


FRONT VIEW


*NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.  
Drain location from front of cutout*

# Grill | Teppanyaki Module


## STANDARD INSTALLATION

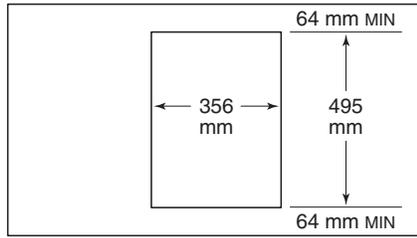

COUNTERTOP CUT-OUT

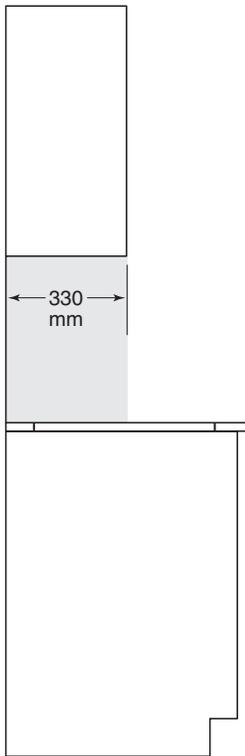

SIDE VIEW

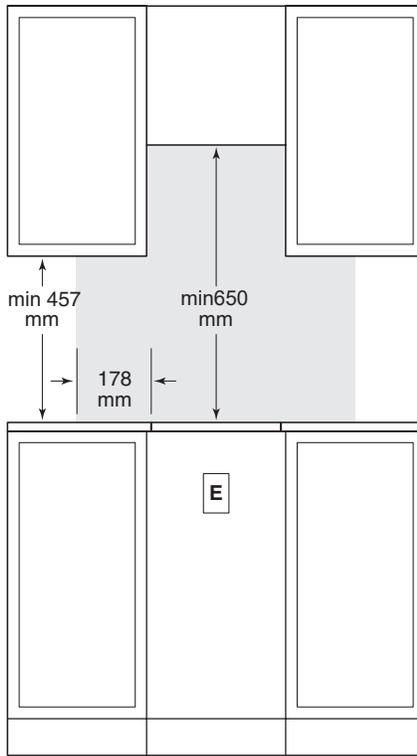


FRONT VIEW


*NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.*

Gas | Multifunction Module


STANDARD INSTALLATION

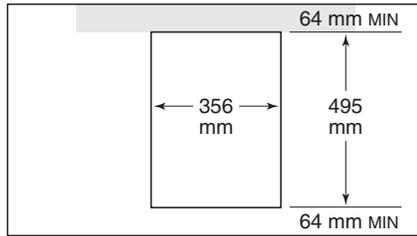

COUNTERTOP CUT-OUT

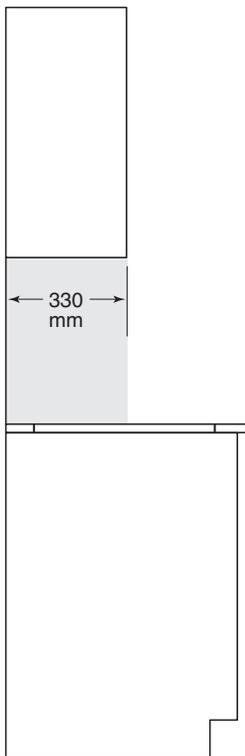

SIDE VIEW

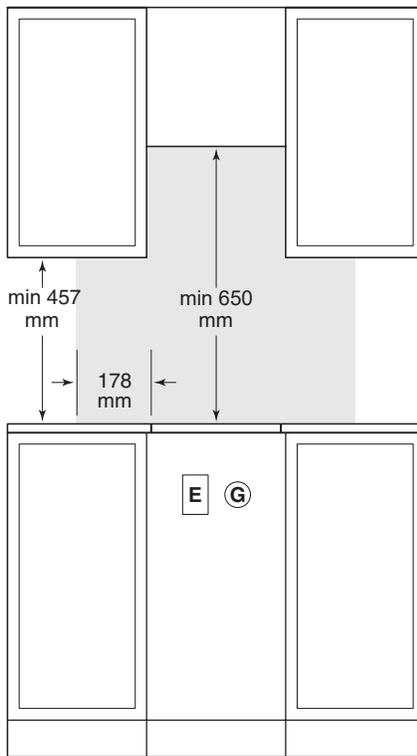

FRONT VIEW

*NOTE: The rangehood fitted above the cooktop must be installed according to the installation instructions for the rangehoods.*

*A minimum clearance of 650mm from the top of the burner port to a grease filter/range hood/combustible surface and 750mm to an Exhaust fan.*

## Wolf Appliance International Limited Warranty

FOR RESIDENTIAL USE

### FULL TWO YEAR WARRANTY\*

For two years from the date of original installation, this Wolf Appliance product warranty covers all parts and labor to repair or replace, under normal residential use, any part of the product that proves to be defective in materials or workmanship. All service provided by Wolf Appliance under the above warranty must be performed by Wolf factory certified service, unless otherwise specified by Wolf Appliance, Inc. Service will be provided during normal business hours.

### LIMITED THIRD THROUGH FIFTH YEAR WARRANTY

For five years from the date of original installation, Wolf Appliance will repair or replace the following parts that prove to be defective in materials or workmanship: gas burners (excluding appearance), electric heating elements, blower motors (ventilation hoods), electronic control boards, magnetron tubes and induction generators. The part(s) will be repaired or replaced, free of charge, with the owner paying for all other costs including labor. All service provided by Wolf Appliance under the above warranty must be performed by Wolf factory certified service, unless otherwise specified by Wolf Appliance, Inc. Service will be provided during normal business hours.

For more information regarding your Wolf product warranty, contact your authorized Wolf dealer. Warranties must comply to all country, state, city, local and or ordinance.

\*Stainless steel (doors, panels, handles, product frames and interior surfaces) are covered by a limited 60-day parts and labor warranty for cosmetic defects.





WOLFAPPLIANCE.COM